


Standard Three Pin Panel Insert High Temperature

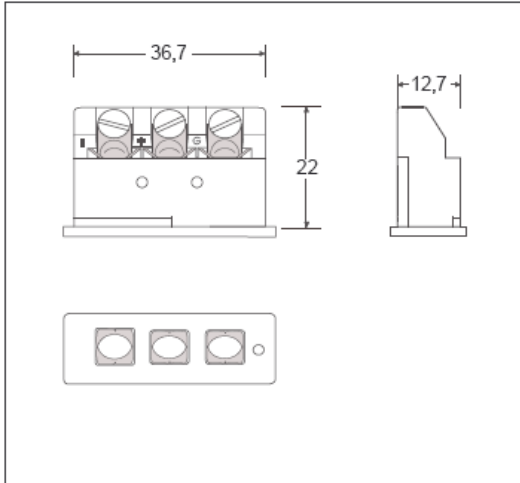

APPLICATION:

Panel insert for thermocouple and RTD circuits. Third connection for ground or shield connection or for three wire RTD's. Specially designed to be used together with Hamitherm high temperature panel sets

CONSTRUCTION:

- Glass filled thermosetting with original thermocouple material pins and springloaded inserts.
- Polarized pins ensure proper connection.
- Molded barriers prevent short circuit.
- Polarity indication next to connection screws

WIRE SIZE:

- Accepts wires from 0,2 mm to 2,0 mm.

TEMPERATURE RATING:

- 350 °C Max.

COLOR CODE:

- Body color black. Calibration indication by colored dot.

ACCESSORIES:

- Can be offered as a complete high temperature panel for six circuit. See separate specification sheet.

ORDERING CODE

PSITH-xx

For last two digits 'xx' see table below

Calibration Code	E	J	K	N	T	U	R/S	C	B
Compensation material for							Pt13Rh Pt	W5Re W26Re	Pt6Rh/ Pt30Rh
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Cu	CPX	Cu
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Alloy 11	CNX	Cu
IEC Color Code									
Color Body	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey
Code	EI	JO	KI	NI	TI	UI	RI	C	BI
ANSI Color Code									
Color Body	Violet	Black	Yellow	Orange	Blue	White	Green	Red	Grey
Code	EI	JI	KA	NA	TA	UI	RA	C	BI
DIN Color Code									
Color Body		Blue	Green		Brown		White		Grey
Code		JD	KI		TI		RD		BI