




MINIATURE 5 VDC OUTPUT FLATPACK IS® PRESSURE TRANSDUCER

LLE-1-500 SERIES

- Wind Tunnel, Flight Test
- Nozzle and Fuselage Applications
- 5 VDC Output
- Moisture Protected
- Patented Leadless Technology **VIS®**

The LLE-1-500 series transducers are an excellent solution for Wind Tunnel, Flight Test, Nozzle (vectoring, etc.), and Fuselage pressure measurement applications. Their light weight and flat packaging makes them especially suitable for direct adherence to test parts where other means of pressure sensor installation are undesirable or not possible. These transducers incorporate the latest Kulite patented and patent pending technologies in pressure sensor development.

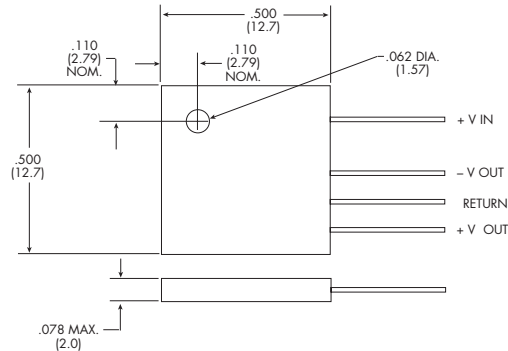

CONSULT FACTORY FOR SPECS. ON SEALED GAGE

INPUT Pressure Range	1.7 25	3.5 50	7 100	17 250	35 BAR 500 PSI
Operational Mode	Absolute, Sealed Gage				
Over Pressure	2 Times Rated Pressure Range				
Burst Pressure	3 Times Rated Pressure Range				
Pressure Media	All Nonconductive, Noncorrosive Liquids or Gases (Most Conductive Liquids and Gases - Please Consult Factory)				
Maximum Electrical Current	25 mA				
Rated Electrical Excitation	12 ± 4 VDC or 28 ± 4 VDC				
OUTPUT Full Scale Output (FSO)	5 V ± 3%				
Residual Unbalance	0.5 V ± 1.5% FSO				
Output Impedance	200 Ohms (Typ.)				
Combined Non-Linearity, Hysteresis and Repeatability	± 0.25% FS BFSL (Typ.)				
Resolution	Infinitesimal				
Frequency Response	DC to 3000 Hz				
Acceleration Sensitivity % FS/g Perpendicular Transverse	5.0x10 ⁻⁴ 6.0x10 ⁻⁵	3.0x10 ⁻⁴ 4.0x10 ⁻⁵	1.5x10 ⁻⁴ 2.0x10 ⁻⁵	1.0x10 ⁻⁴ 9.0x10 ⁻⁶	6.0x10 ⁻⁵ 6.0x10 ⁻⁶
Insulation Resistance	100 Megohm Min. @ 50 VDC				
ENVIRONMENTAL Operating Temperature Range	-40°F to +280°F (-40°C to +140°C)				
Compensated Temperature Range	-40°F to +250°F (-40°C to +120°C) Other Ranges Quoted on Request				
Thermal Zero Shift	± 1% FS/100°F (Typ.)				
Thermal Sensitivity Shift	± 1% /100°F (Typ.)				
Linear Vibration	30,000g (Max.)				
Altitude	Unaffected				
Humidity	100% Relative Humidity				
Mechanical Shock	100g half Sine Wave 11 msec. Duration				
PHYSICAL Electrical Connection	4 Pins				
Weight	1.5 Grams (Nom.)				
Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology				

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters.

Continuous development and refinement of our products may result in specification changes without notice - all dimensions nominal. (M)

KULITE SEMICONDUCTOR PRODUCTS, INC. • One Willow Tree Road • Leonia, New Jersey 07605 • Tel: 201 461-0900 • Fax: 201 461-0990 • <http://www.kulite.com>