





HIGH SENSITIVITY MINIATURE SHORT LENGTH PRESSURE TRANSDUCER

XCS-152 SERIES

- High Sensitivity
- Patented Silicon on Silicon Integrated Sensor **VIS®**
- Superior Signal To Noise Ratio
- Static And Dynamic Capability

The XCS Series uses a diaphragm of advanced design which gives a substantially higher basic output allowing for high mV/psi sensitivities and improved signal to noise ratio.

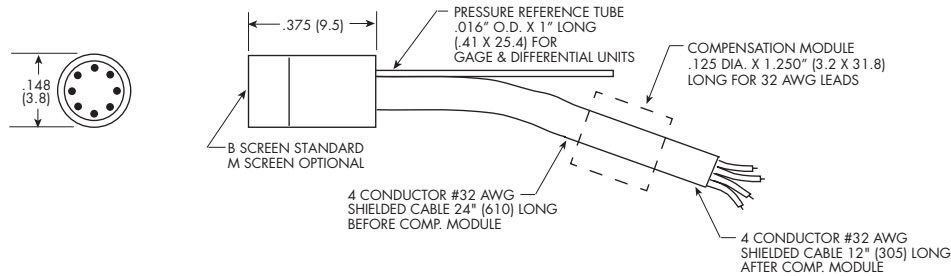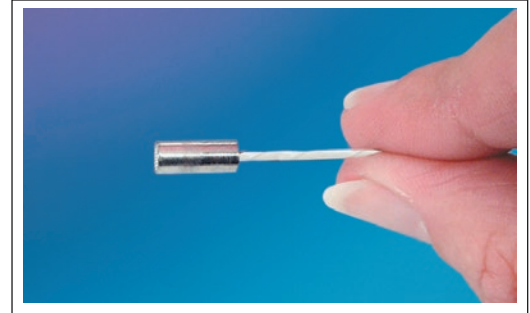

WIRING	
COLOR	DESIGNATION
RED	+ INPUT
BLACK	- INPUT
GREEN	+ OUTPUT
WHITE	- OUTPUT

NOTE: FOR INTERNAL COMPENSATION CONSULT FACTORY **CONSULT FACTORY FOR SPECS. ON SEALED GAGE**

INPUT	Pressure Range	0.35 5	0.7 10	1.0 BAR 15 PSI
	Operational Mode	Absolute, Gage, Sealed Gage, Differential		
	Over Pressure	2 Times Rated Pressure		
	Burst Pressure	3 Times Rated Pressure		
	Pressure Media	All Nonconductive, Noncorrosive Liquids or Gases		
	Rated Electrical Excitation	10 VDC/AC		
	Maximum Electrical Excitation	12 VDC/AC		
	Input Impedance	1000 Ohms (Min.)		
OUTPUT	Output Impedance	1000 Ohms (Nom.)		
	Full Scale Output (FSO)	150 mV (Nom.) 50 mV (Nom.) for SG		200 mV (Nom.) 100 mV (Nom.) for SG
	Residual Unbalance	± 5 mV (Typ.)		
	Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% FSO BFSL (Typ.), ± 0.5% FSO (Max.)		
	Resolution	Infinitesimal		
	Natural Frequency of Sensor Without Screen (KHz) (Typ.)	150	175	200
	Acceleration Sensitivity % FS/g Perpendicular	1.5x10 ⁻³	1.0x10 ⁻³	6.5x10 ⁻⁴
	Insulation Resistance	100 Megohm Min. @ 50 VDC		
ENVIRONMENTAL	Operating Temperature Range	-65°F to +250°F (-55°C to +120°C)		
	Compensated Temperature Range	+80°F to +180°F (+25°C to +80°C) Any 100°F Range Within The Operating Range on Request		
	Thermal Zero Shift	± 1% FS/100°F (Typ.)		
	Thermal Sensitivity Shift	± 1% /100°F (Typ.)		
	Steady Acceleration	10,000g. (Max.)		
	Linear Vibration	10-2,000 Hz Sine, 100g. (Max.)		
PHYSICAL	Electrical Connection	4 Conductor 32 AWG Cable 36" Long		
	Weight	.3 Gram (Nom.) Excluding Module and Cable		
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon		

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters.

Continuous development and refinement of our products may result in specification changes without notice - all dimensions nominal. (G)

Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.