

THERMOCOUPLE WIRE

Fiberglass Insulated 950°F (510°C)

APPLICATIONS

- Heat Treatment
- Temperature Sensors
- Steel and Aluminum Industry
- Plastic Processing Equipment
- Furnace Surveys
- Testing

AVAILABLE OPTIONS

- Reduced Itch Tuffbond™ Impregnation on Singles
- Stabilized Type K & E Conductors
- Fused PTFE Tape Moisture Barrier
- Double Glass Braid Insulation
- Twisted/Shielded Pair
- Metal Coverings
- Tighter Than Special Limit Accuracy Tolerances

PRODUCT FEATURES

- Special Color Codes
- Calibration Test Reports
- Continuous use up to 950°F (510°C)
- Single Exposure up to 1200°F (650°C)
- Good Moisture, Chemical and Abrasion Resistance
- High Temperature Stabil



PRODUCT SPECIFICATIONS

CONDUCTORS: Solid or stranded thermocouple wire per ASTM E230 & ANSI MC96.1

INSULATIONS: Braided fiberglass with high temperature impregnation* (24 to 30 AWG Served Glass)

CONSTRUCTION: Parallel conductors

JACKET: Braided fiberglass with high temperature impregnation*


OPERATING TEMPERATURE: +950°F (+510°C) continuous
+1200°F (+650°C) single exposure

LIMITS OF ERROR: Conforms to ASTM E230, IEC 584 and ANSI MC 96.1

COLOR CODE: Conforms to ASTM E230 and ANSI MC 96.1 (International Color Codes Available)

*Impregnation maintained to +400°F (+200°C)

ORDERING CODE

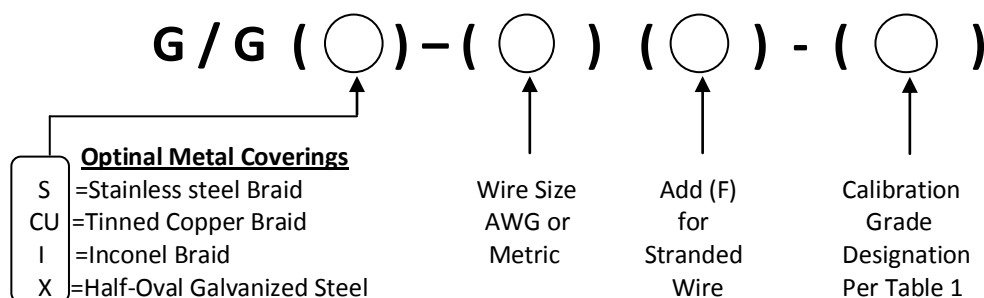

Conductor Size		Insulation Thickness		Jacket Thickness		Outer Diameter		Net Weight	
AWG	(MM)	inches	(MM)	inches	(MM)	inches	(MM)	LB/MF	(KG/KM)
14	(1.63)	.007	(.18)	.010	(.25)	.100 x .180	(2.5 x 4.6)	29	(43)
16	(1.29)	.007	(.18)	.010	(.25)	.085 x .150	(2.2 x 3.8)	20	(30)
16F*	(1.47)	.007	(.18)	.010	(.25)	.094 x .168	(2.4 x 4.3)	22	(33)
18	(1.02)	.007	(.18)	.010	(.25)	.070 x .124	(1.8 x 3.2)	13	(19)
20	(0.81)	.006	(.15)	.006	(.15)	.056 x .100	(1.4 x 2.5)	7.7	(11)
20°F*	(0.97)	.006	(.15)	.006	(.15)	.060 x .108	(1.5 x 2.7)	8.3	(12)
22	(0.64)	.006	(.15)	.006	(.15)	.049 x .086	(1.2 x 2.2)	5.4	(8.0)
24	(0.51)	.006	(.15)	.006	(.15)	.040 x .068	(1.0 x 1.7)	3.2	(4.8)
24F*	(0.61)	.006	(.15)	.006	(.15)	.048 x .084	(1.2 x 2.1)	3.4	(5.1)
26	(0.41)	.004	(.11)	.006	(.15)	.036 x .060	(0.9 x 1.5)	2.2	(3.3)
28	(0.32)	.004	(.11)	.006	(.15)	.033 x .054	(0.8 x 1.4)	1.7	(2.5)
30	(0.25)	.004	(.11)	.006	(.15)	.030 x .048	(0.8 x 1.2)	1.3	(1.9)

MANY ITEMS AVAILABLE FROM STOCK WITHIN 24 HOURS

The products referenced above represent the most popular constructions. Other constructions can be manufactured to meet individual specification and application requirements. Contact factory for additional information.

Table 1

Initial Calibration Tolerances Per ASTM E230 and ANSI MC96.1

Thermocouple Type	Temperature Range °F (°C)	Grade Designation	Tolerance-Reference Junction 32°F (0°C)		
			Standard Grade Limits °F (°C) whichever is greater	Grade Designation	Special Grade Limits °F (°C) whichever is greater
Thermocouple Wire					
T	32 (0) to 700 (370)	T	±1.8 (1) or ±0.75%	TT	±0.9 (0.5) or 0.4%
J	32 (0) to 1400 (760)	J	±4 (2.2) or ±0.75%	JJ	±2 (1.1) or 0.4%
E	32 (0) to 1600 (870)	E	±3.1 (1.7) or ±0.50%	EE	±1.8 (1) or 0.4%
K or N	32 (0) to 2300 (1260)	K or N	±4 (2.2) or ±0.75%	KK or NN	±2 (1.1) or 0.4%
T*	-328 (-200) to 32 (0)	T	±1.8 (1) or ±1.5%	TT	±0.9 (0.5) or 0.8%**
E*	-328 (-200) to 32 (0)	E	±3.1 (1.7) or ±1%	EE	±1.8 (1) or 0.5%**
K*	-328 (-200) to 32 (0)	K	±4 (2.2) or ±2%	KK	**
Extension Wire					
TX	32 (0) to 212 (100)	TX	±1.8 (1)	TTX	±0.9 (0.5)
JX	32 (0) to 400 (200)	JX	±4 (2.2)	JJX	±2 (1.1)
EX	32 (0) to 400 (200)	EX	±3.1 (1.7)	EEX	±1.8 (1)
KX or NX	32 (0) to 400 (200)	KX or NX	±4 (2.2)	KKX or NNX	±2 (1.1)
RX or SX	32 (0) to 400 (200)	RX or SX	±9 (5)		
BX	32 (0) to 212 (100)	BX***	±7.6 (4.2)		
BX	32 (0) to 400 (200)	BX ALLOY***	±6.7 (3.7)		

* Thermocouple material is normally supplied to meet tolerances above 0°C (32F). If material is required to meet tolerances below 0°C (32°F), the purchase order must so state. Special selection of material is required.

** Suggested initial calibration tolerance. Requirements should be discussed between purchaser and supplier.

*** Copper vs. copper can be used as an extension for Type B thermocouples if the transition is below 100°C (212°F). Above 100°C (212°F), PCLW30-6 alloy should be used as the positive extension wire.