

THERMOCOUPLE EXTENSION WIRE


Individual /Overall Shield FEP Insulated 400°F (200°C)

APPLICATIONS:

- Petrochemical Plants
- Utilities and Industrial Plants
- Pharmaceutical Industry
- Thermocouple Circuits
- Food Processing Plants
- Agricultural Industry
- FDA Approved Applications
- Suitable for 300 Volt Applications

PRODUCT FEATURES:

- Continuous Use -328°F (-200°C) to +400°F (+200°C)
- Excellent Chemical Resistance
- Excellent Electrical Properties
- Passes IEEE 383 Flame Test
- Passes VW-1 Flame Test
- Sunlight Resistant
- UL Listed CL2, CL3, PLTC or ITC Constructions are Also Available

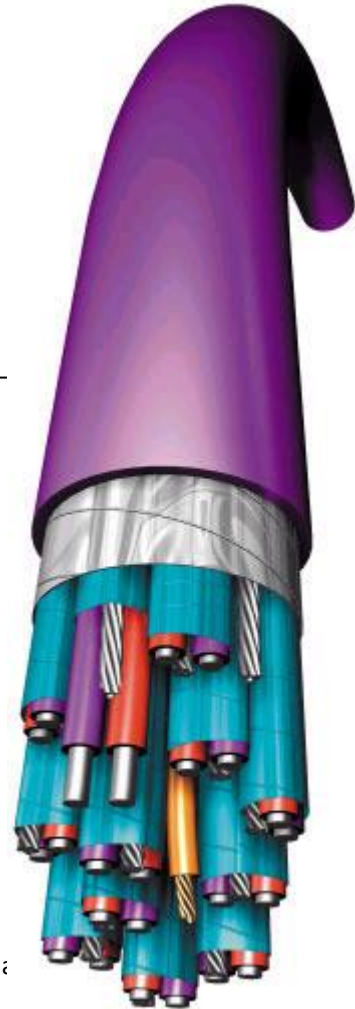


PRODUCT SPECIFICATIONS:

- CONDUCTORS:** Solid or stranded thermocouple extension wire per ASTM E230 & ANSI MC96.1
10 to 30 AWG (2.6 to .25MM)
- INSULATION:** Nominal .010" (.25MM) flame retardant extruded fluoropolymer FEP
- COLOR CODE:** Per ASTM E230 & ANSI MC96.1
- CONSTRUCTION:** Twisted pairs
- PAIR IDENTIFICATION:** Numbered polyester tapes
- INDIVIDUAL SHIELD:** .00135" (.03MM) aluminum/polyester tape, 25% overlap
- INDIVIDUAL DRAIN WIRE:** 22 AWG (.61MM) 7-strand tinned copper
- COMMUNICATION WIRE:** 22 AWG (.61MM) 7-strand copper insulated with nominal .010" (.25MM) orange FEP (4 pair and larger)
- CABLE SHIELD:** .002" (.05MM) aluminum/polyester tape, 25% overlap
- CABLE DRAIN WIRE:** 20 AWG (.91MM) 7-strand tinned copper
- OUTER JACKET:** Flame retardant extruded fluoropolymer FEP

(ETFE +300°F (+150°C) and PFA +500°F (+260°C) are also available)

ORDERING CODE

TEX / ALM / ALTEXTWK () - () () - ()

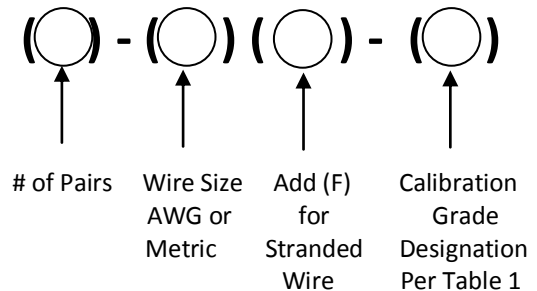

Wire Size	Numbers Of Pairs	Outer Jacket Thickness		Outer Diameter		Bend Radius		Pull Tension		Net Weight	
		Inches	(MM)	Inches	(MM)	Inches	(MM)	LB	KG	LB/MF	KG/KM
16 AWG (1.29 MM) Solid	2	.020	(0.51)	.345	(8.8)	2.8	(70)	100	(45)	73	(109)
	4	.020	(0.51)	.405	(10.3)	3.2	(82)	192	(87)	128	(190)
	8	.025	(0.64)	.544	(13.8)	4.4	(111)	376	(171)	238	(354)
	12	.025	(0.64)	.649	(16.5)	5.2	(132)	560	(255)	345	(513)
	16	.030	(0.76)	.737	(18.7)	5.9	(150)	744	(338)	451	(671)
	20	.030	(0.76)	.802	(20.4)	6.4	(163)	928	(422)	551	(820)
	24	.030	(0.76)	.897	(22.8)	7.2	(182)	1112	(505)	655	(975)
	36	.030	(0.76)	1.007	(25.6)	8.1	(205)	1664	(756)	950	(1414)
18 AWG (1.02 MM) Solid	2	.020	(0.51)	.303	(7.7)	2.4	(62)	70	(32)	56	(83)
	4	.020	(0.51)	.355	(9.0)	2.8	(72)	132	(60)	95	(141)
	8	.020	(0.51)	.465	(11.8)	3.7	(94)	256	(116)	167	(248)
	12	.025	(0.64)	.565	(14.4)	4.5	(115)	380	(173)	247	(367)
	16	.025	(0.64)	.631	(16.0)	5.0	(128)	504	(229)	320	(476)
	20	.025	(0.64)	.687	(17.4)	5.5	(140)	628	(285)	389	(579)
	24	.030	(0.76)	.778	(19.7)	6.2	(158)	752	(342)	472	(702)
	36	.030	(0.76)	.872	(22.1)	7.0	(177)	1124	(511)	680	(1012)
20 AWG (0.81 MM) Solid	2	.015	(0.38)	.263	(6.7)	2.1	(53)	50	(23)	41	(61)
	4	.020	(0.51)	.318	(8.1)	2.5	(65)	92	(42)	75	(112)
	8	.020	(0.51)	.414	(10.5)	3.3	(84)	176	(80)	126	(187)
	12	.025	(0.64)	.505	(12.8)	4.0	(103)	260	(118)	191	(284)
	16	.025	(0.64)	.548	(13.9)	4.4	(111)	344	(156)	243	(362)
	20	.025	(0.64)	.611	(15.5)	4.9	(124)	428	(195)	297	(442)
	24	.025	(0.64)	.682	(17.3)	5.5	(139)	512	(233)	347	(516)
	36	.030	(0.76)	.774	(19.7)	6.2	(157)	764	(347)	513	(763)

The products referenced above represent the most popular constructions. Other constructions can be manufactured to meet individual specification and application requirements. Contact factory for additional information.

Table 1

Initial Calibration Tolerances Per ASTM E230 and ANSI MC96.1

Thermocouple Type	Temperature Range °F (°C)	Grade Designation	Tolerance-Reference Junction 32°F (0°C)		
			Standard Grade Limits °F (°C)	Thermocouple Type	Temperature Range °F (°C)
Extension Wire					
TX	32 (0) to 212 (100)	TX	±1.8 (1)	TTX	±0.9 (0.5)
JX	32 (0) to 400 (200)	JX	±4 (2.2)	JJX	±2 (1.1)
EX	32 (0) to 400 (200)	EX	±3.1 (1.7)	EEX	±1.8 (1)
KX or NX	32 (0) to 400 (200)	KX or NX	±4 (2.2)	KKX or NNX	±2 (1.1)
Compensating Extension Wire					
RX or SX	32 (0) to 400 (200)	RX or SX	±9 (5)		

ELECTRICAL CHARACTERISTICS

Insulation passes 3000 V ac spark test.

Completed cable passes a dielectric test of 1300 V dc for 60 seconds, conductor to conductor and conductor to shield.