


# Connectors

## Standard Connector Duplex

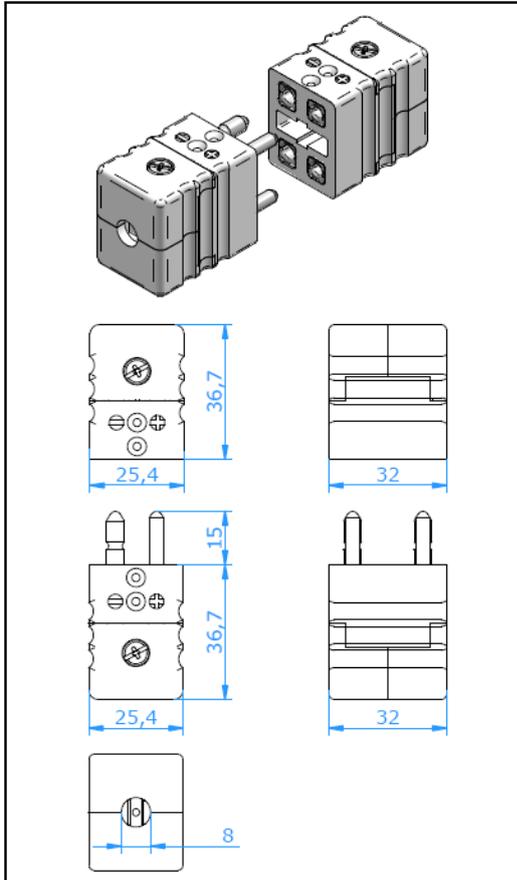

### APPLICATION:

Connector for thermocouple and RTD circuits. Is very well suited for 4-wire RTD-'s. Solid pin design ensures good contact even in demanding applications. Hollow pin design offers a good quality product at competitive pricing for less frequently used connectors.

### CONSTRUCTION:

- Glass filled thermoplastic body with original thermocouple material pins and springloaded inserts.
- Polarized pins.
- Central cover screw design for quick wiring.
- Molded barriers prevent short circuit.
- Captive cover screw for easy assembly.
- Connects with standard horizontal and vertical panels.

### WIRE SIZE:

- Accepts wires from 0,2 mm to 2,0 mm.
- Maximum cable diameter 8,0 mm.

### TEMPERATURE RATING:

- 200 °C Max.

### COLOR CODE:

- Body color brown. Calibration indication printed on cover. Colored dot indication optional.

### ACCESSORIES:

- Crimpinserts and Wire clamp bracket available. For other accessories consult factory.

### ORDERING CODE

Plug Solid Pin:

CSPD-x

'x' is Calibration Code (see tabel below)

Plug Hollow Pin:

CSPDL-x

Jack:

CSJD-x

Calibration Code	E	J	K	N	T	U	R/S	C	B
Compensation material for							Pt13Rh Pt	W5Re W26Re	Pt6Rh/ Pt30Rh
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Cu	CPX	Cu
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Alloy 11	CNX	Cu