

EX1200-7600

5 W PROGRAMMABLE RESISTOR LADDER

FEATURES

Ideal for UUT loading or simulation

Wide resistance range from 0.5 Ω to 1.5 $M\Omega$

 $0.1~\Omega$ step size

Over-voltage, over-current, and over-temperature sensing protects unit under test

External voltage and current sense for monitoring

IVI drivers



RELIABLE DATA FIRST TIME EVERY TIME


OVERVIEW

The EX1200-7600 is a single output, programmable resistor ladder. It is designed for applications such as RTD or other sensor simulation, process control, ATE calibration, and device under test loading. It contains internal, high-precision 5 W power resistors that are switched in and out via mechanical relays. The EX1200-7600 is capable of producing any resistance value between 0.5 Ω to 1,500,000 Ω and can be adjusted in 0.1 Ω increments via external commands. It is designed for terminal voltages from 0 to 200 V dc and for currents up to 0.5 A. The EX1200-7600 is part of the EX1200 family of products and can be mixed and matched with other EX1200 series modules to configure high-density measurement and switching systems.

FAULT SENSING

After power up, reset or a fault condition, all relays on this module are open, removing the load from the device under test. A fault condition is the result of exceeding the maximum current, maximum voltage, or maximum temperature for the module. Additionally, a voltage sense out signal provides a scaled indication of the voltage across the resistance, and a current sense out signal provides a scaled indication of the current through the circuit, both of which can be monitored by an external measurement device (such as an EX1200 series DMM). This can be used to force all relays open if a set voltage or current is exceeded thereby protecting the unit under test.

BLOCK DIAGRAM

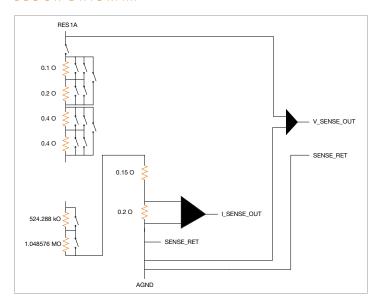

RELIABLE DATA FIRST TIME EVERY TIME

130

General Specifications

MODEL TYPE CHANNELS

SWITCHING TIME

RATED SWITCH OPERATIONS

Mechanical Electrical

OVER TEMPERATURE PROTECTION

PCB Surface Temperature

MAXIMUM SWITCHING VOLTAGE

MAXIMUM SWITCHING CURRENT

MAXIMUM SWITCHING/CARRY POWER

POWER CONSUMPTION

3.3 V 5 V 24 V

VOLTAGE OUTPUT RANGE/GAIN CURRENT OUTPUT RANGE/GAIN

SETTING ACCURACY

0.5 – $60.0~\Omega$

60.1 – 1,499,999 Ω

1,499,999.1 Ω – 2,097,152.6 Ω MINIMUM INCREMENT (RESOLUTION)

CONNECTOR TYPE

Programmable resistor load

1

< 5 ms

 5×10^{6}

1 x 10⁵ (full load)

102 °C (215.6 °F)

200 V AC rms

0.5 A

5 W

0.129 A

0.0041 A (add 24 mA for each relay closure)

0.2 A (maximum value)

40:1 ±1% full-scale

100:1 $\pm 1\%$ full-scale

 $\pm 0.15~\Omega$

±0.25 % of programmed value

Not specified

0.1 Ω

15-pin

Ordering Information

EX1200-7600 5 W programmable resistor ladder

ACCESSORIES AND TOOLS

77-0076-015 Mating connector
Connector backshell